





CONTENTS

- AX PRO Unboxing
- AX PRO Adding
- Peripherals Adding (Involved products: Keypad, Tag, Keyfob, PIRCAM, Siren, Magnetic Contact, PIR and Emergency Button)
- Operation Via Hik-Connect (Area setting, how to arm/disarm, device share, system operation, SMS&Call, and video verification)


Product Showcase







Product Showcase

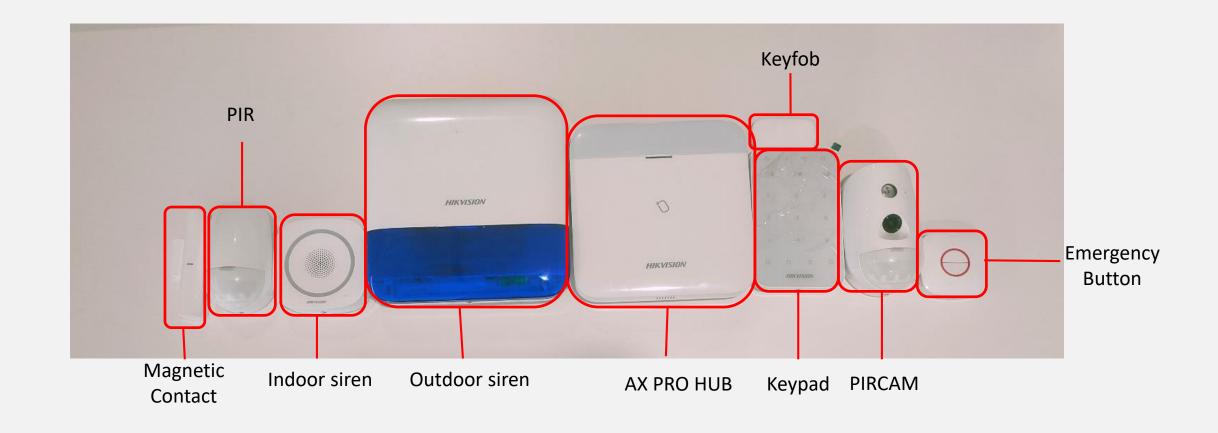




Unboxing

Model: DS-PWA96-M-WE




Accessories

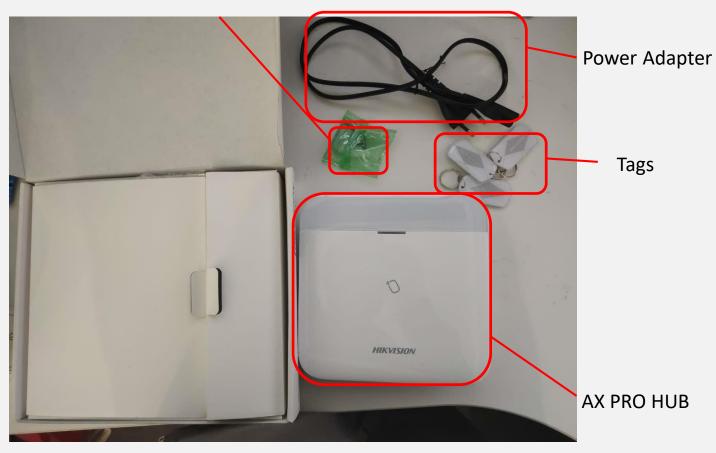


HIK ISION

Unboxing




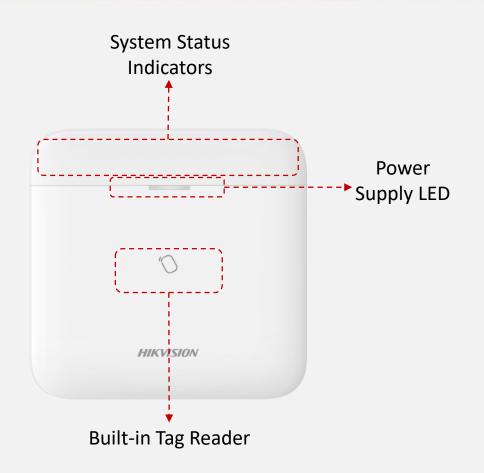

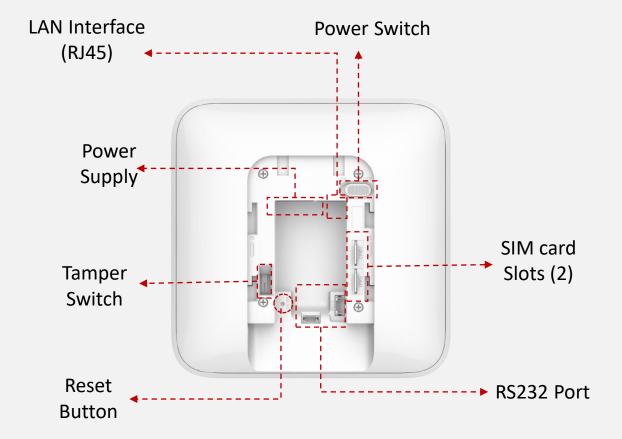

Front of AX PRO

Rear of AX PRO

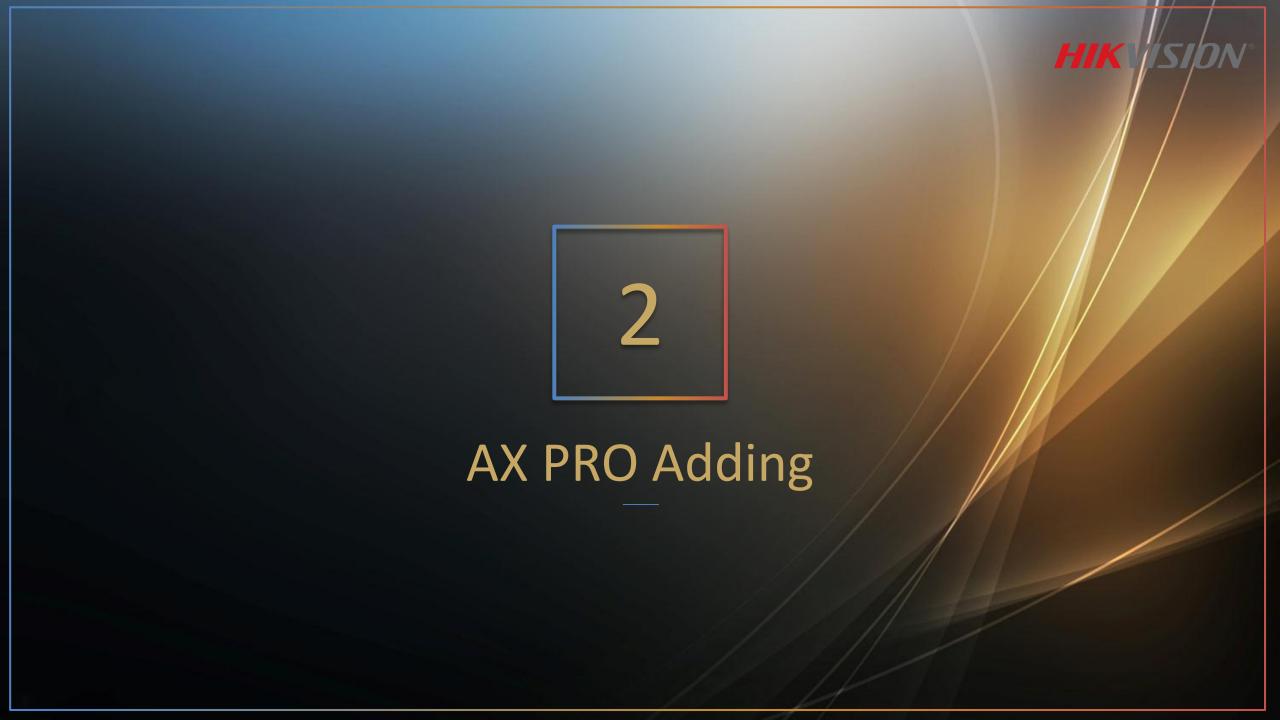

Three ways to connect Hub to cloud


HIK ISION

- Use Hik-Connect to connect Hub by Wi-Fi
- Use LAN port to connect Hub with LAN
- Use SIM Card



Adding via Hik-Connect by Wi-Fi


Connect your phone to Wi-Fi first

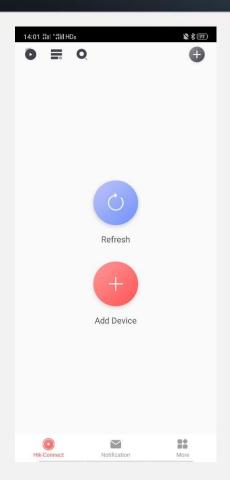






Scan QR code backboard

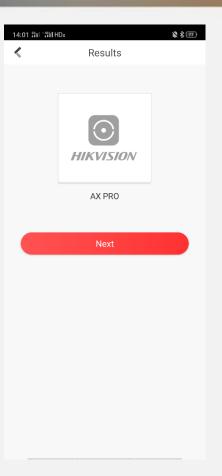

Press Next

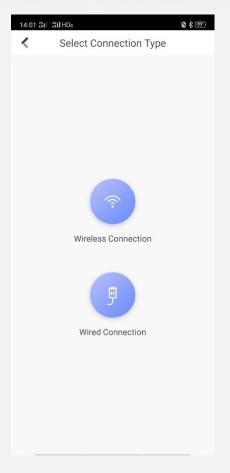


Choose type of connection (we select wireless here)

HIK ISION


Adding via Hik-Connect




Choose 'The device is started' then click Next

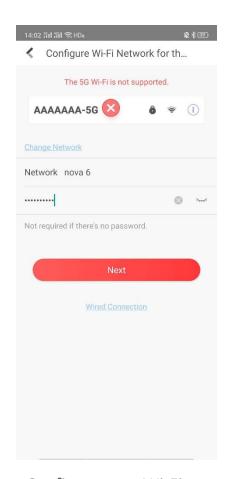

Configure your Wi-Fi

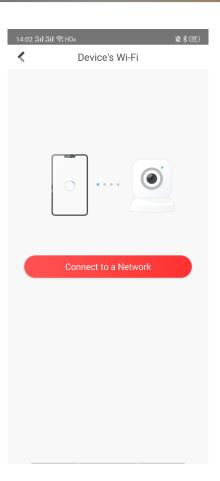

Press 'Connect to a Network'

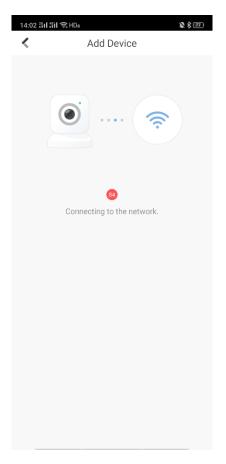

Wait until it connected

Connect to Cloud via SIM Card



Work available with CMCC CUCC in China mainland



Nano Card with card holder



Insert SIM card backboard

Cloud status indicator




Wait until the status light turns green


Adding to Hik-Connect




15:08 31 ° 41 HDa

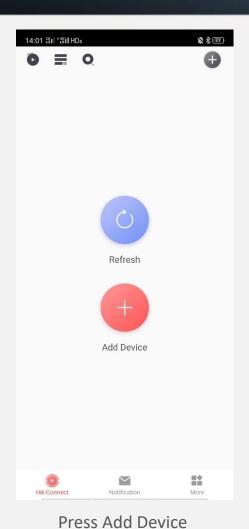



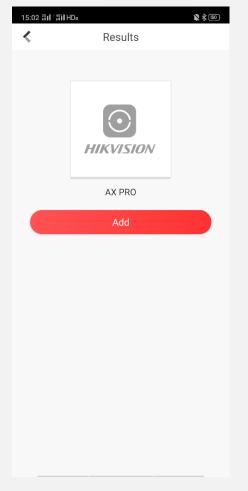

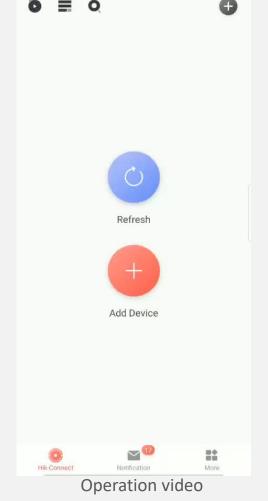


Scan QR code


Add device

Connect to Cloud with Router








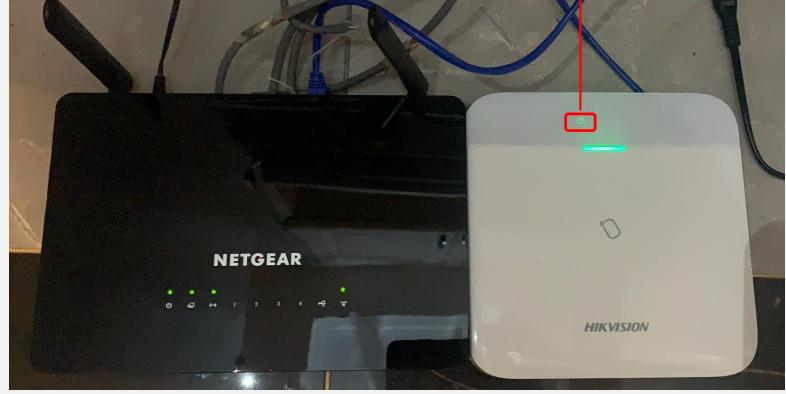



Adding to Hik-Connect

Same as SIM Card's Method

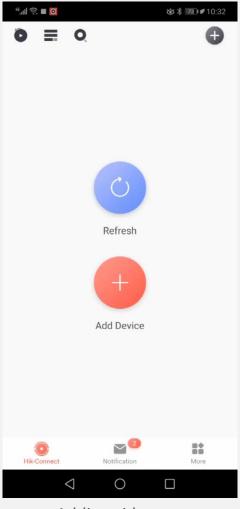

Adding video

Reset





Power on the hub, when hear the first voice, press and hold on the reset button

Reset Video



In this part, you may need

HIK SIL

Wireless Keypad DS-PK1-E-WE

Wireless Keyfob DS-PKF1-WE

Tag DS-PTS-MF

PIRCAM DS-PDPC12P-EG2-WE

PIR DS-PDC15-EG2-WE

Wireless Magnetic Contact DS-PDMC-EG2-WE

Wireless Outdoor Siren DS-PS1-E-WE

Wireless Emergency Button DS-PDEB2-EG2-WE










Unboxing

Keypad Adding






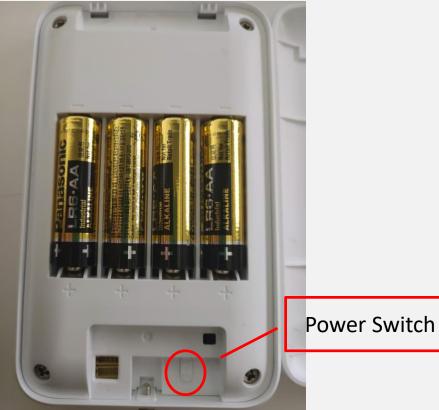




Keypad Adding

You'd better open the keypad before adding

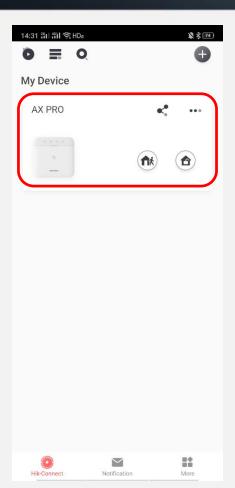

Press AX PRO interface to configuration site

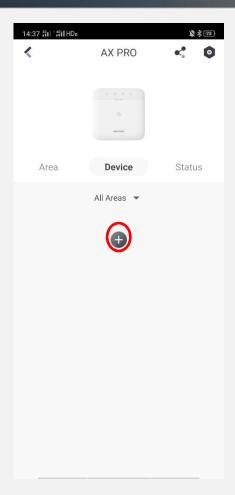

Press '+' to add




Scan QR code of the keypad




Power up keypad and finish

HIK ISION


Keypad Setting

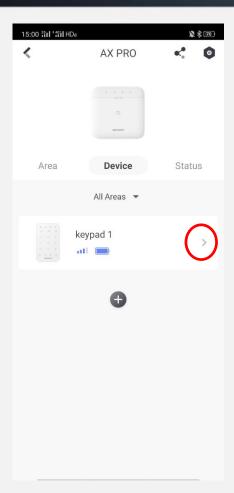

Press '>' to check status

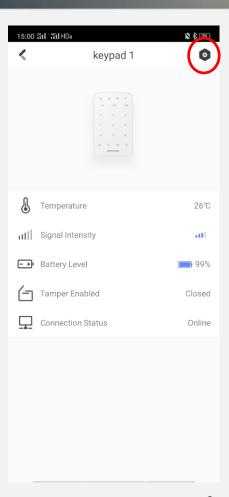


Press Setting Button to configure

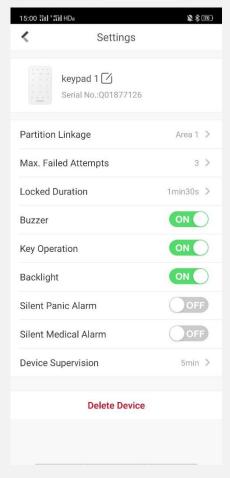


Keypad Setting interface

HIK ISION


Password Setting

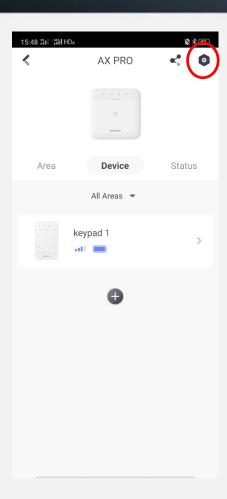

Press Setting Button to configure

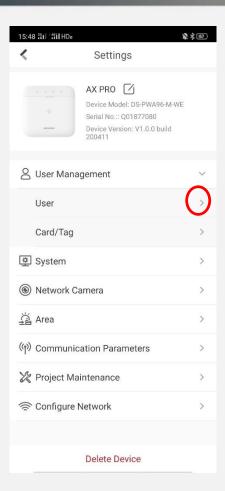


Press '>' to User interface

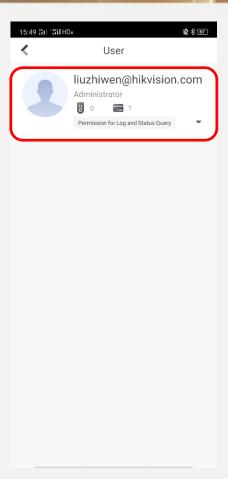


Press User interface to User management site




Password Setting

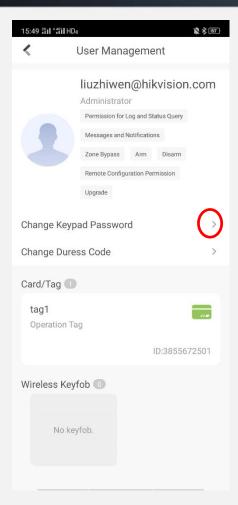

Press '>' to set password

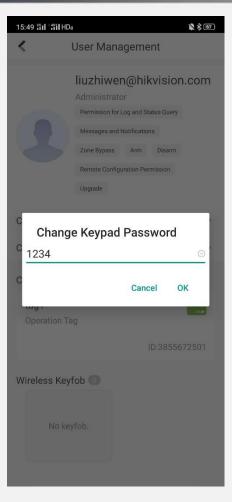


Set a password and press OK

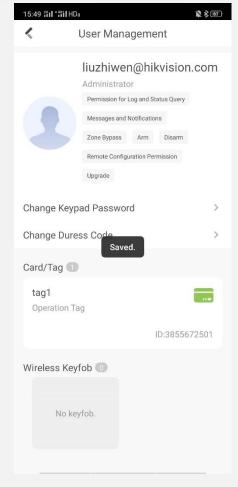



Finished


Tag Adding



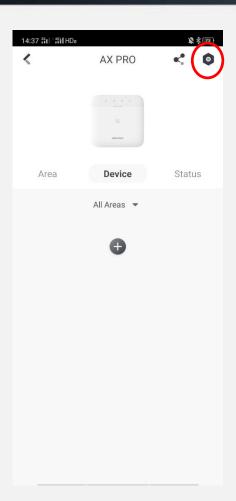

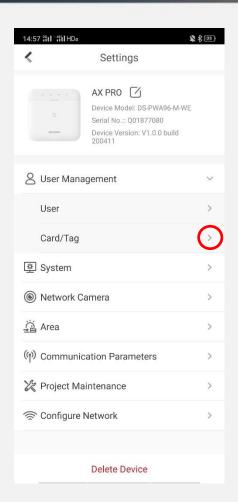

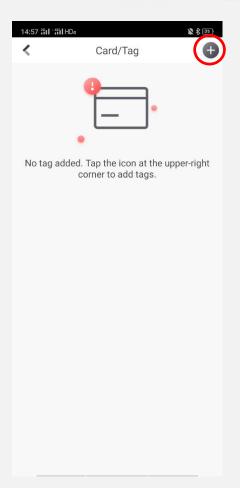

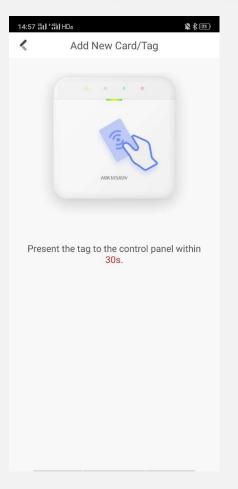

Press Setting Button to configure

Press '>' to Tag interface

Press '+' to add Tag

Swipe tag on the tag reader of the hub

Tag Setting



AX PRO

Device

All Areas -


keypad

* 89


Status

11:05 🏭 🛗 HDo

Area

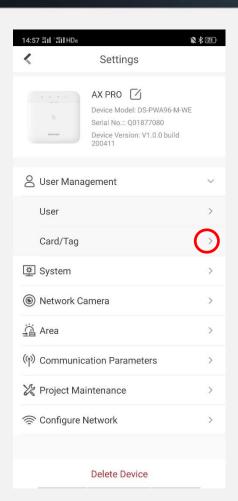




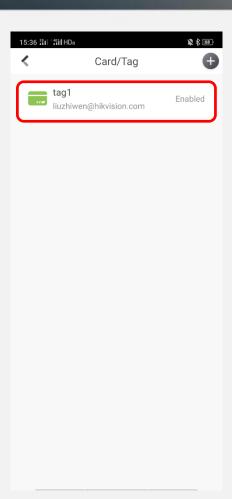

Press Tag interface to configuration site

Tag Setting interface

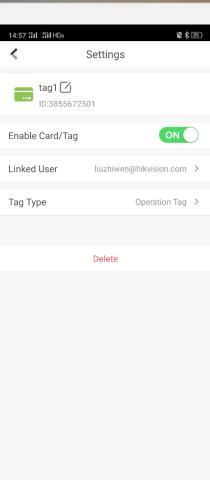






Keyfob Adding

You'd better open the keypad before adding



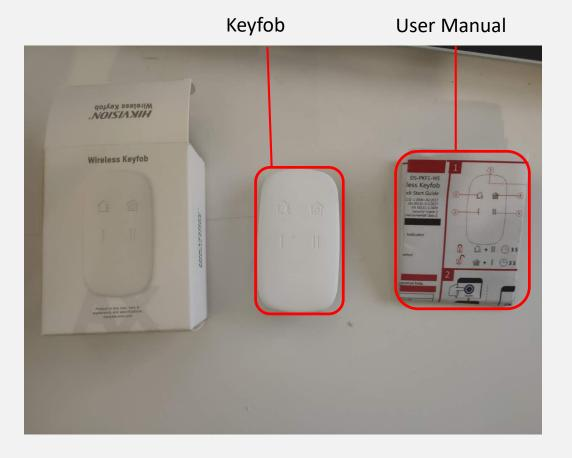

Unboxing

Keyfob Adding








Open the keyfob with screwdriver

Keyfob Adding




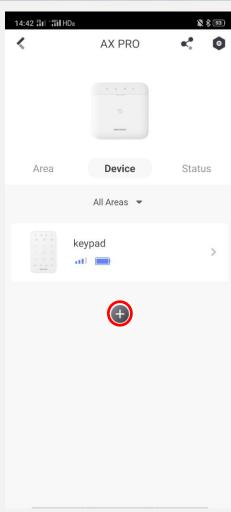


Press '+' to add



Scan the QR code of Keyfob

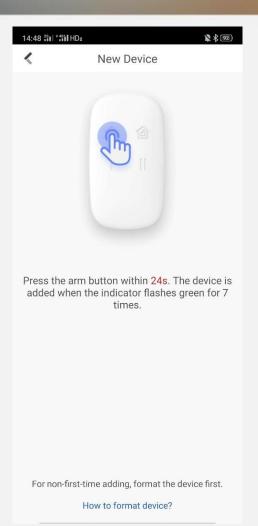


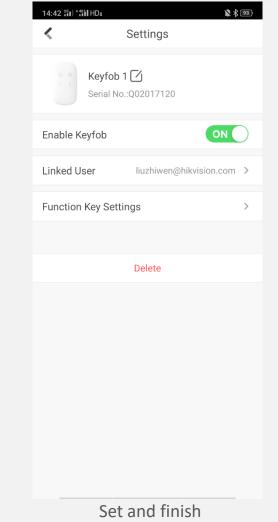



Press Arm button to add

HIK ISION

Keyfob Setting

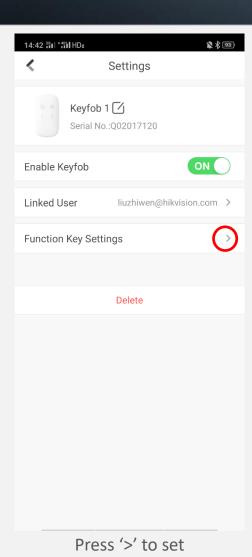

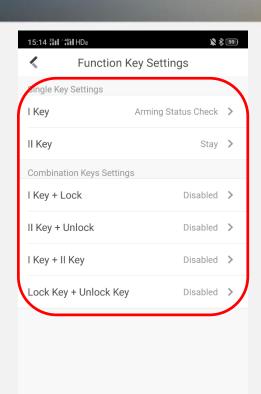

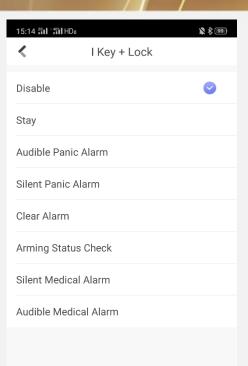



Choose the key that you want

Select the function you want

PIRCAM Adding



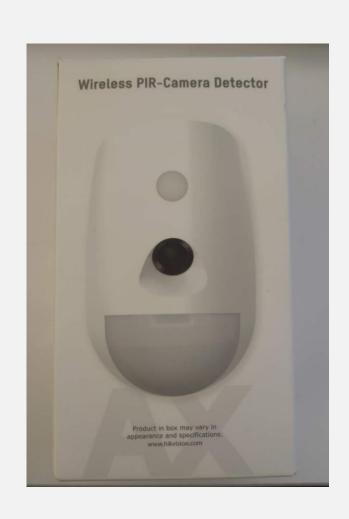

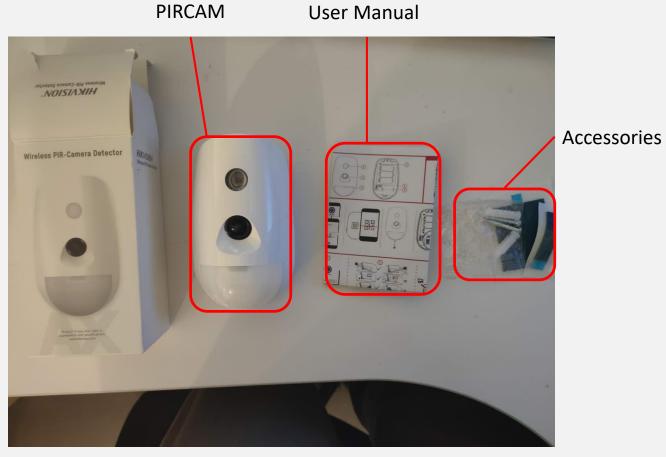


Unboxing

PIRCAM Adding






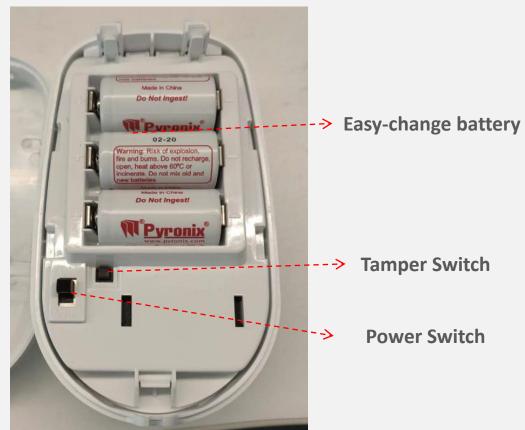

Open the PIRCAM with screwdriver

PIRCAM Adding


You'd better open the PIRCAM before adding

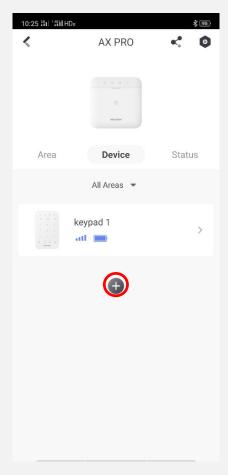

Press '+' to add



Scan the QR code of PIRCAM

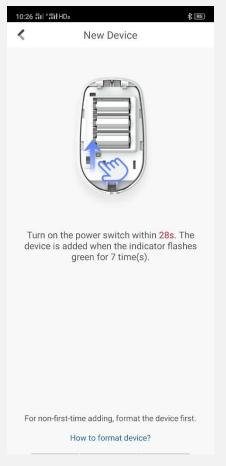


HIK ISION


Power up PIRCAM and finish

HIK ISION


PIRCAM Setting

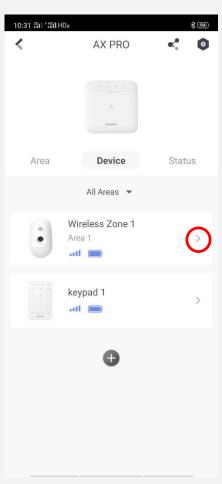

Press '>' to check status

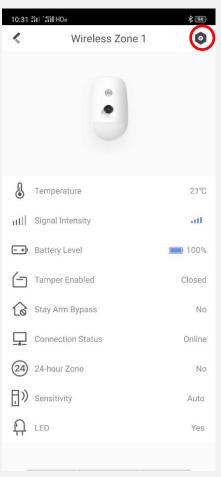


Press Setting Button to configure

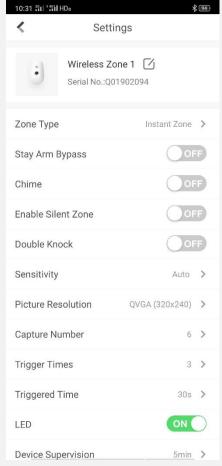


PIRCAM Setting interface

PIR Adding



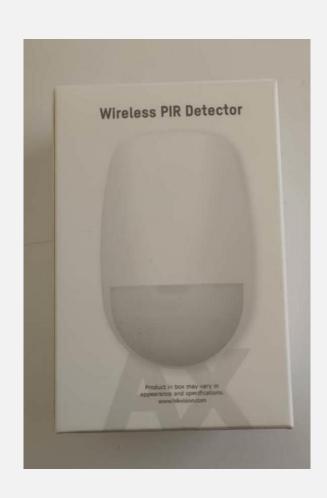

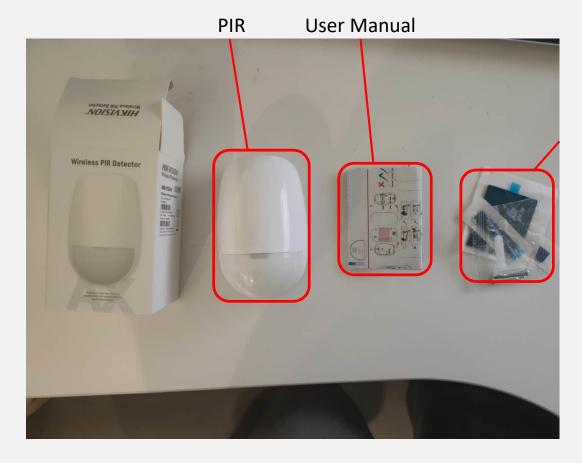

Accessories


Unboxing

PIR Adding





Open the PIR with screwdriver

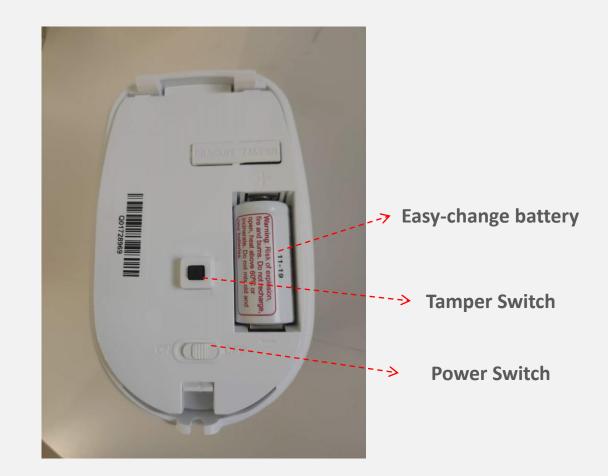

PIR Adding

You'd better open the keypad before adding


13:49 28 0 48 HDa

New Device

№ \$ 60

*****^

* \$ 60

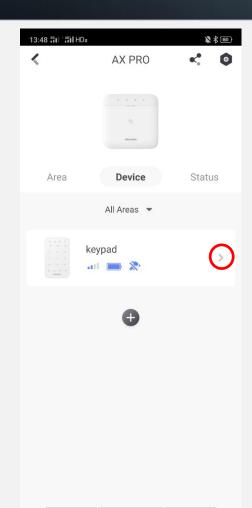




Scan QR Code

13:48 251 451 HDa

Turn on the power switch within 29s. The device is added when the indicator flashes green for 7 time(s). For non-first-time adding, format the device first. How to format device? Scan the QR code of PIR Power up and add

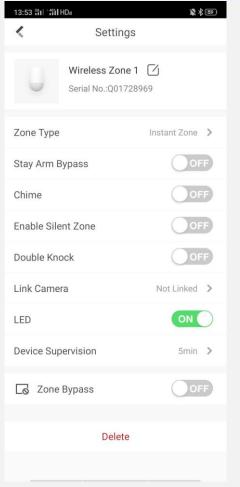


Press '+' to add

Set and finish

Magnetic Contact Adding



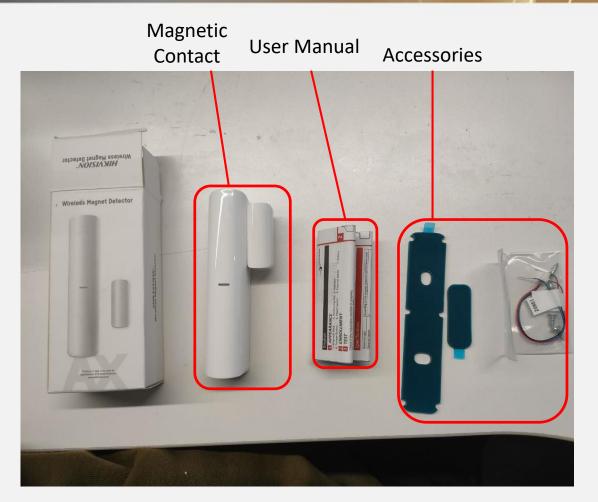


Unboxing

Magnetic Contact Adding

09:56 개 개 중 HDs



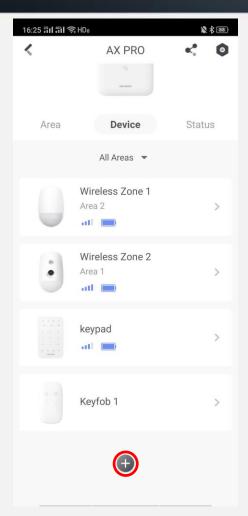


Press '+' to add



New Device Turn on the power switch within 29s. The device is added when the indicator flashes green for 7 time(s). For non-first-time adding, format the device first. How to format device?

¥ 84 **4**

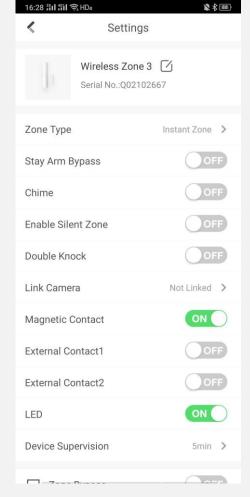

Power up and add

Set and finish


Siren Adding





Tamper Switch


Power Switch

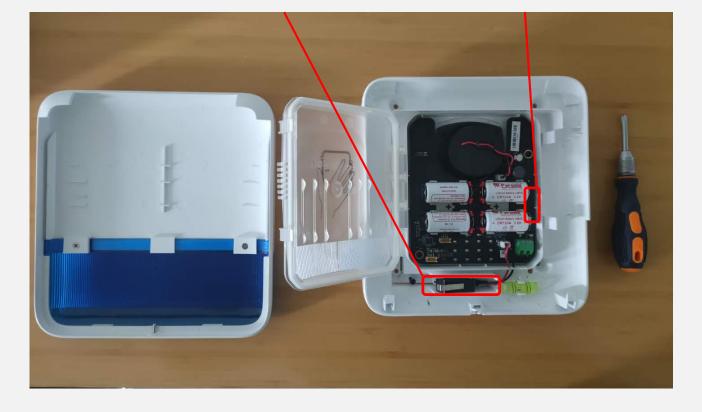

Open the Siren with screwdriver

Siren Adding



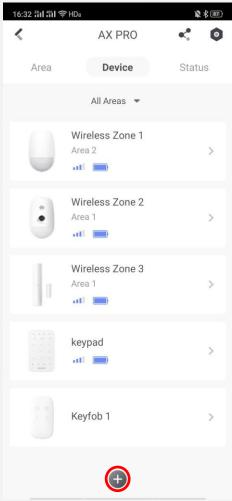


Press '+' to add



Scan the QR code of Siren




Power up and add

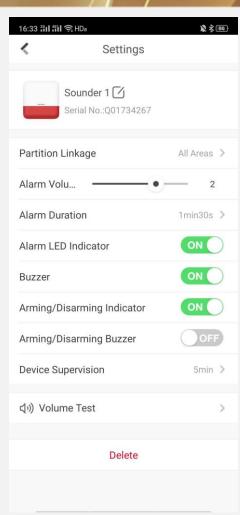


Set and finish

Emergency Button Adding




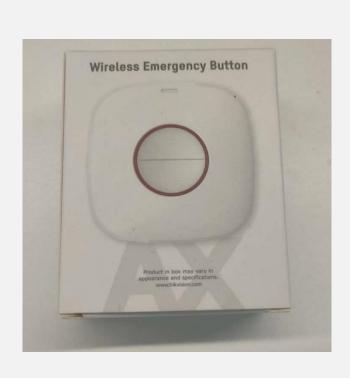


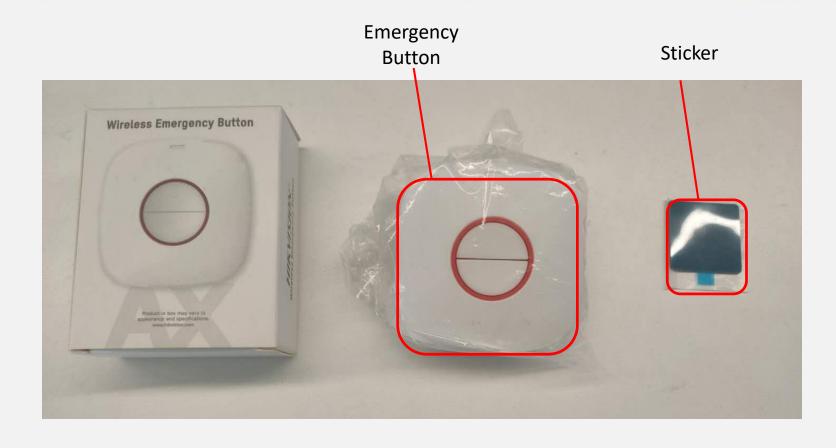



À HDB 461 0461 96

Emergency Button Adding

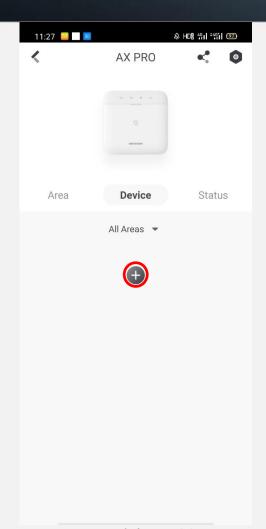

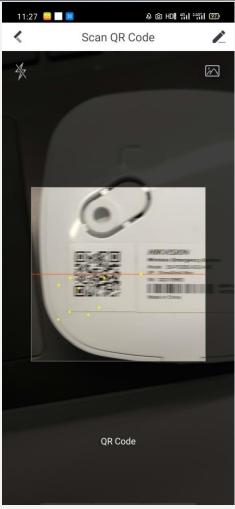

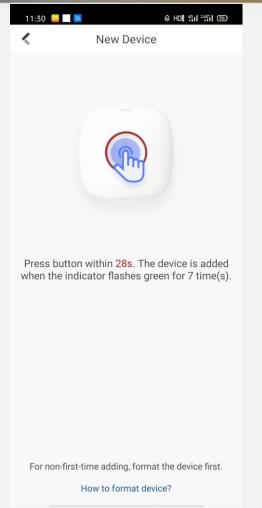

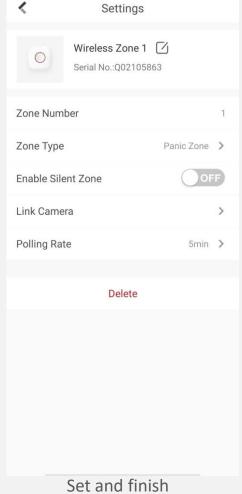


11:31 📔 🔣

Press '+' to add Scan the QR code


Press button to add

HIK JISIDN Operation Via Hik-Connect


Area Adding

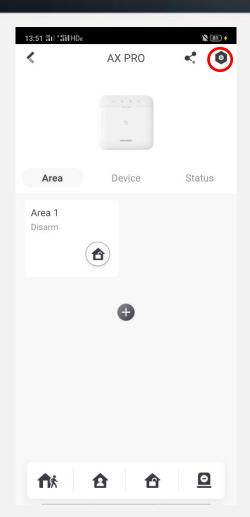


Press Setting Button to configure

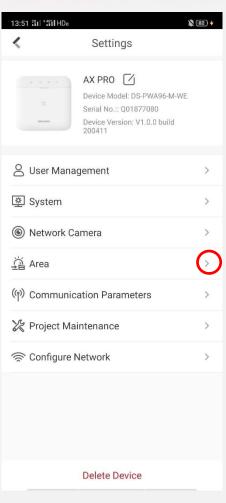

Press '>' to Area interface

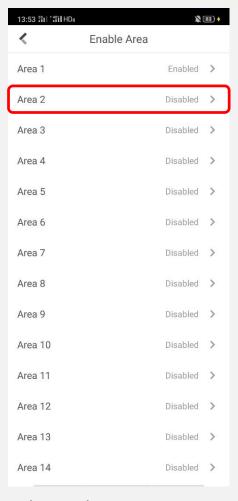


Choose the Area you want

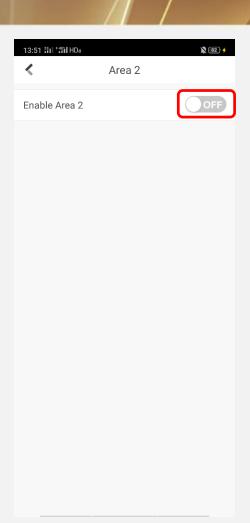


Press to enable




Area Setting

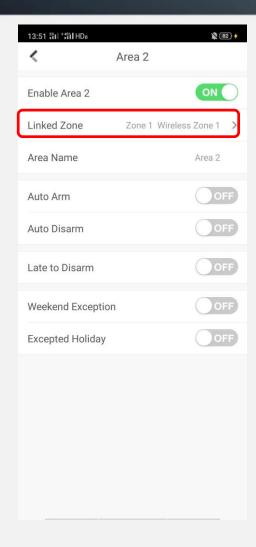

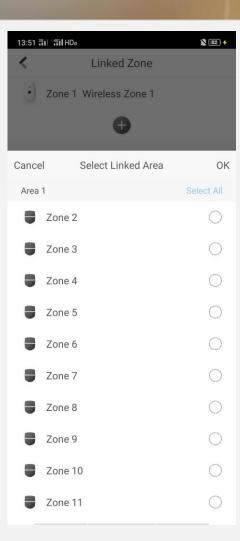





Something you should know

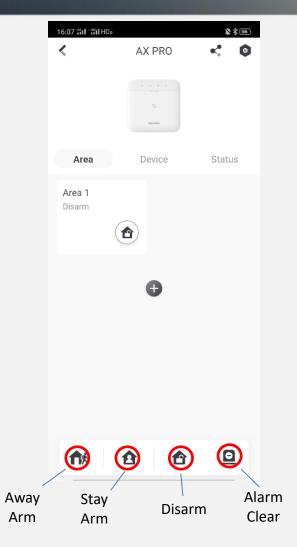

These four buttons are used for the whole system, not for a single area.

Arming

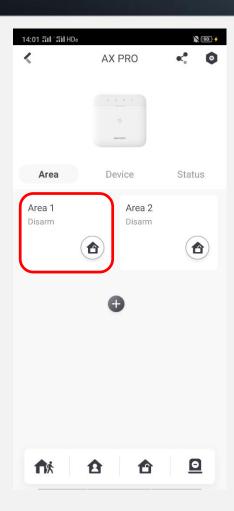

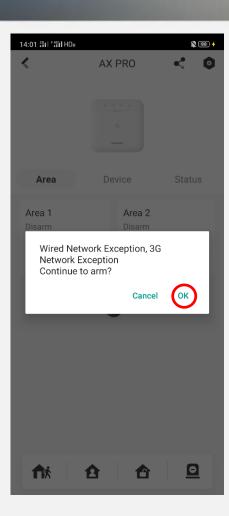


14:04 251 251 HDa 92 🗲 < 0 AX PRO Area Device Status Area 2 Area 1 Away **1 ☆ ○**

Arm successfully


Press Area 1 icon to arm Area 1

System Fault Check, press OK to continue

Disarming

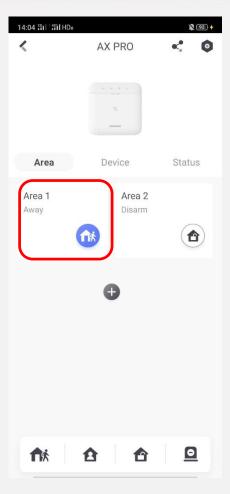


Press Area1 icon to disarm the system

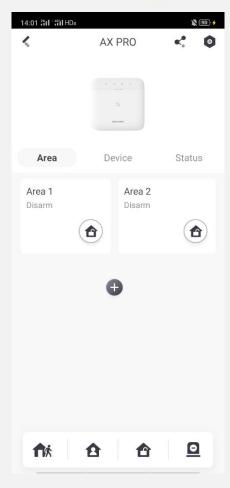


System disarmed


Alarm Clear

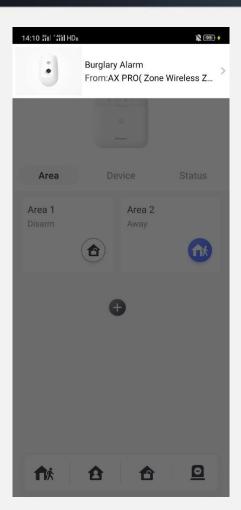

Trigger the detector somehow

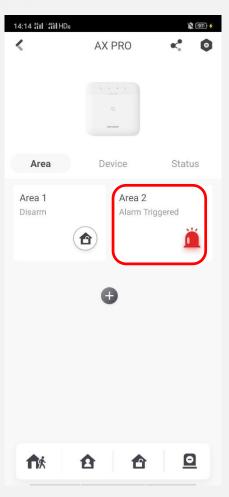

Press Area2 icon to clear alarm

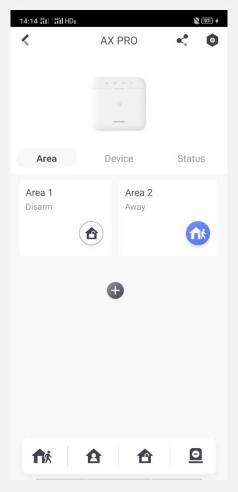



Alarm clear



Device Share



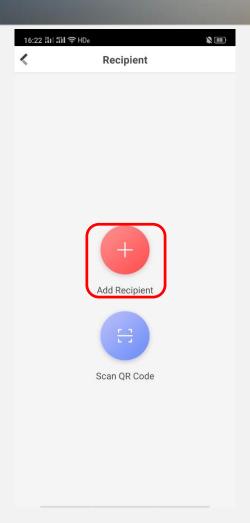


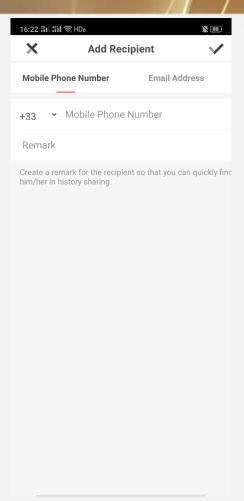

Press to share Choose the way you want

Use phone number or email to share


Device Share

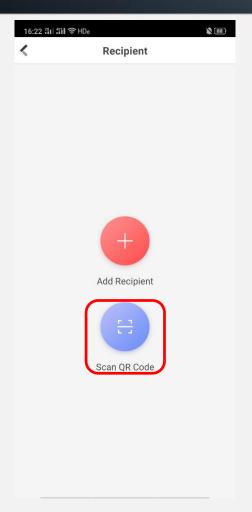

Choose the way you want




Scan QR code and share (other's Hik-Connect)

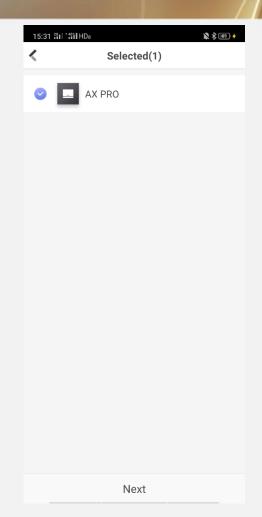


Choose the device and share



Device Share

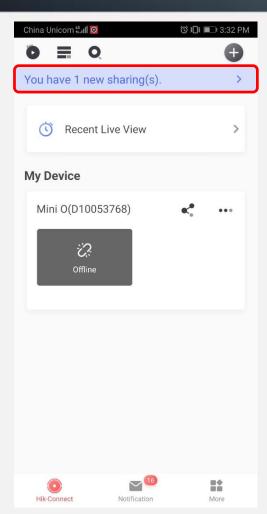



Receive notification

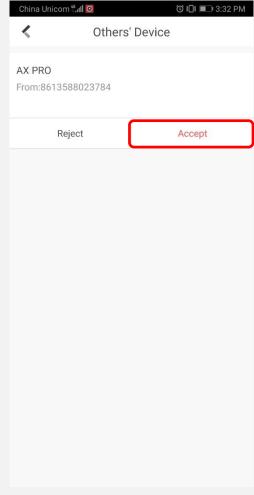


Accept and finish

System Configuration

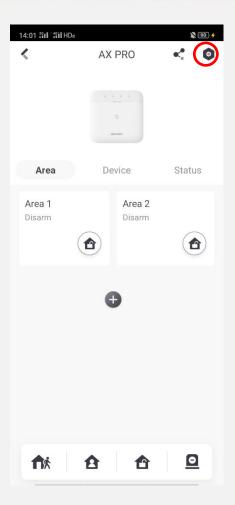

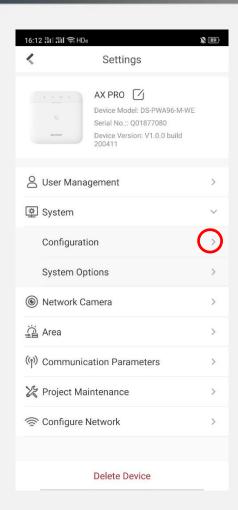

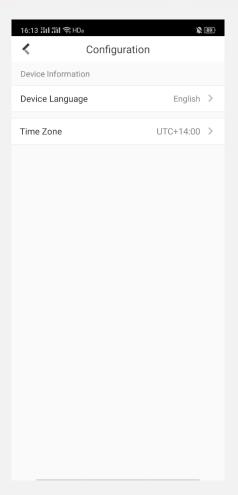


Press Setting Button to configure


Press '>' to Configuration interface




System Configuration

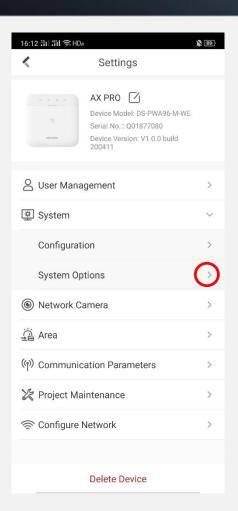

Press '>' to System Options

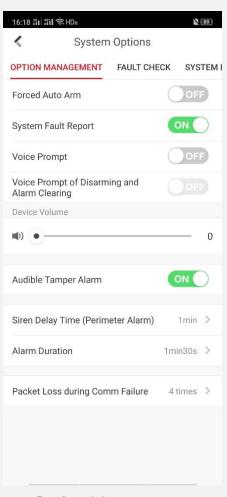


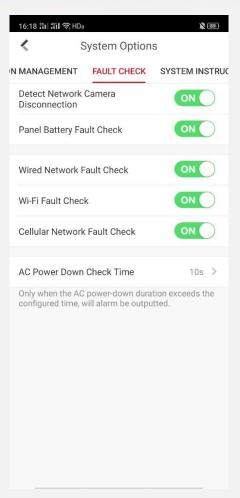



Option Management


Fault Check

SMS & Call

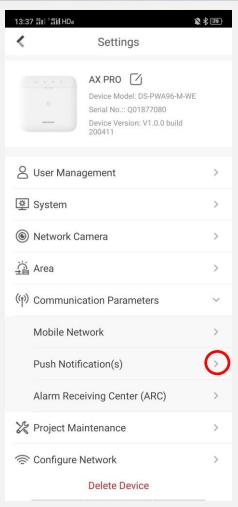

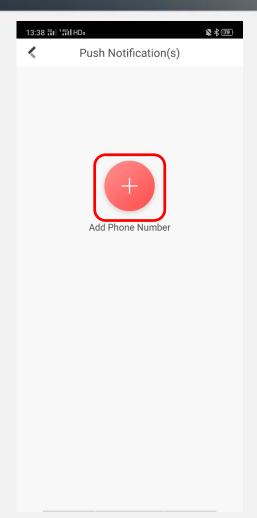

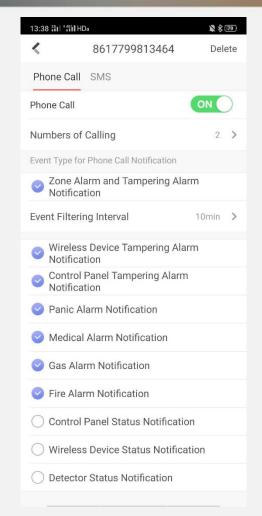

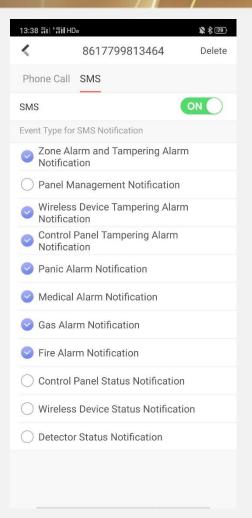


Add and configure

Add and configure

SMS & Call



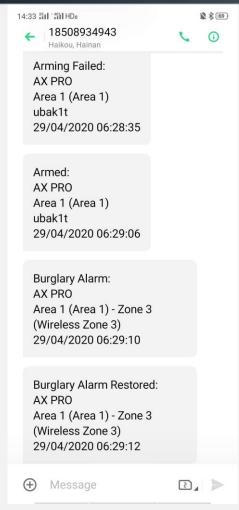





Notification SMS Call


№ \$ 96


Video Verification

Camera Adding

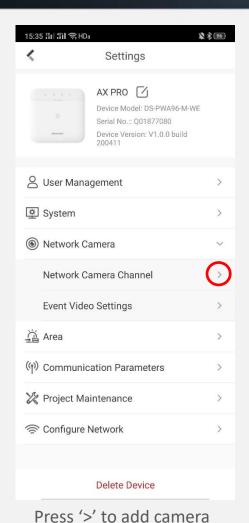

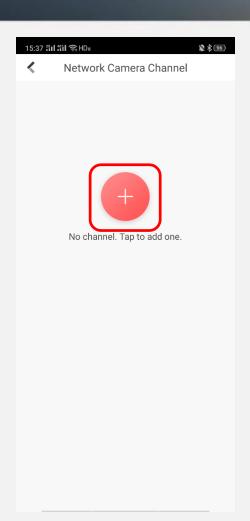

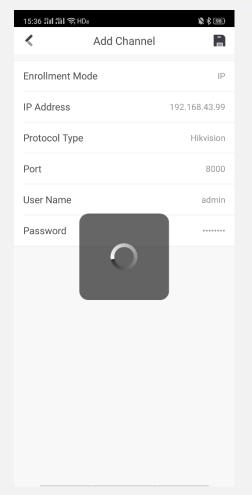

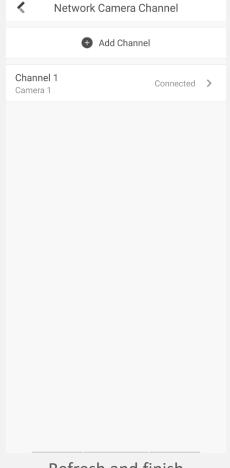

15:36 캐네 웨 중 HDa

Press to add

Input parameters and save

Refresh and finish

1 \$ 95


camera 1@Q018...


 \odot


HIKVISION


Video Verification

Zone linkage

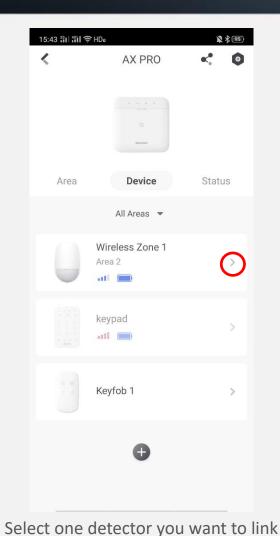

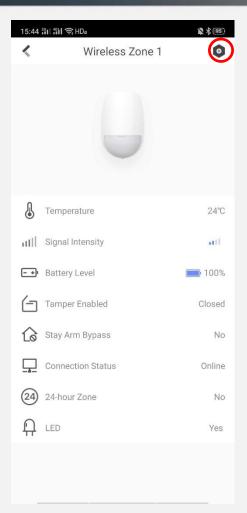

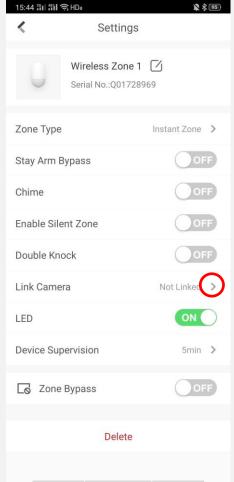

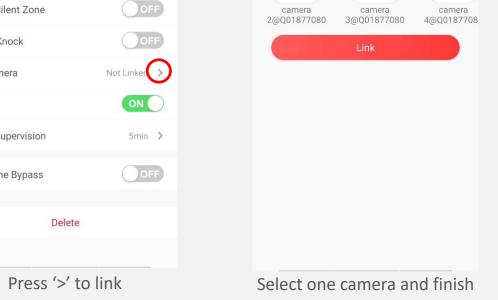

15:47 웨네 웨니 奈 HDa

Available Cameras

HIKVISION


Link Camera

HIKVISION

Press to configure



Video Verification

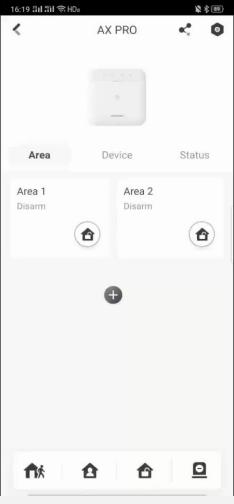

Operation Video



Thanks

Hikvision Digital Technology Co., Ltd.

No.555 Qianmo Road, Binjiang District Hangzhou 310052, China T +86 571 88075998 F +86 571 89935635 overseasbusiness@hikvision.com

www.hikvision.com